

Grain size dependency in the occurrence of sand waves

HENNIE HENRIËT VAN DER VEEN, SUZANNE JACQUELINE MARIE HÉLÈNE
HULSCHER, MICHEL ADRIANUS FREDERIK KNAAPEN

H.H. van der Veen

Water Engineering & Management, University of Twente

P.O. Box 217, 7500AE

Enschede, The Netherlands

E-mail: h.h.vanderveen@utwente.nl

Tel.: +31 53 489 1013

M.A.F. Knaapen

Centre for Coastal Processes,

University of Southampton, United Kingdom

Abstract

Sandy shallow seas, like the North Sea are very dynamic. Several morphological features are present on the bed, from small ripples to sand waves and large tidal sand banks. The larger patterns induce significant depth variations that have an impact on human activities taking place in this area. Therefore, it is important to know where these large-scale features occur, what their natural behaviour is and how they interact with human activities. Here we extend earlier research that compares the results of an idealized model of large-scale seabed patterns with data of seabed patterns in the North Sea. The idealized model is extended with a grain size dependency. The adaptations lead to more accurate predictions of the occurrence of large-scale bed forms in the North Sea. Therefore, grain size dependency and in particular critical shear stress are important to explain the occurrence of sand waves and sand banks in the North Sea.

Keywords: sand waves, North Sea, GIS, grain size

1 Introduction

Figure 1

Shelf seas are very important areas, they are biologically highly active and provide most of the worlds main fisheries. Often, the seabed contains high concentrations of oil and gas supplies and most shelf seas are very busy shipping areas. In most shelf seas sediment is widely abundant and is shaped into a range of bed forms due to the fact that in these areas the largest part of the tidal and wave energy is dissipated. The smallest of these forms are ripples and somewhat larger are megaripples. Here we focus on the large-scale offshore bed forms: sand waves and sand banks (see Figure 1).

The spacing of sand waves varies between 100 and 800 metres, they can be up to 10 metres high and their crests are aligned almost perpendicular to the direction of the main tidal flow. Sand waves can be active and migrate with speeds up to 5 metre per year (Neméth et al., 2002). Tidal sand banks have a spacing of about 5 kilometres, their height can be up to 40 metres, up to a few metres below the water surface, and their crests are aligned at a small angle with respect to the direction of the main tidal current.

The North Sea is a shallow shelf sea. The tides in the Southern part are semi-diurnal and the tidal amplitudes ranges from 2.4 metre in the Strait of Dover to 0.6 metre more to the North. At spring tide, the flow velocities at the surface vary from 1.4 m/s in the western and southern part to 0.7 m/s along the Dutch coast and the northern part. The seabed consists mainly of fine to medium sands, ranging from 125 to 500 μm , but at some places, in the Strait of Dover and in front of the coast of East Anglia (UK), patches of gravel have been observed (Van der Molen, 2002). On the seabed a variety of large-scale bed forms such as sand banks and sand waves are present.

Bed forms interact with human activities, as the North Sea is intensively used for different purposes. User functions that are affected by the large-scale morphology are navigation, telecommunication cables, oil and gas transportation (pipelines), oil and gas

mining, sand extraction, artificial islands and offshore wind parks. For safety reasons, it is important to know where the bed forms occur, what their natural behaviour is and how they interact with human activities.

Figure 2

Here we predict the occurrence of large-scale bed forms in the southern part of the North Sea using an idealized model of Hulscher (1996) and compare the predictions for sand waves with observations. Hulscher and van den Brink (2001) were the first to compare the model of Hulscher (1996) against observations of sand wave occurrence in the North Sea. In Hulscher and van den Brink (2001) the spatial variation of sediment characteristics were not accounted for. Furthermore, effects of critical stress were neglected, so even at very low tidal velocities bed pattern formation was allowed.

Belderson (1986) showed (Figure 2) that the magnitude of tidal currents and the occurrence of sand waves are related. This supports the idea that a critical threshold has to be exceeded before sand waves will form.

In the present research we include the above mentioned effects of spatial variations of sediment characteristics and critical stress. All data were gathered in a Geographical Information System (ARCGIS). A GIS is a digital map with extended capabilities to manipulate and analyze geographical data (Heywood et al., 1998). Within this GIS, the new results are compared to observations of sand waves in the North Sea.

In section 2 the theoretical bed pattern model, the effects of inclusion of a grain size dependency, and the GIS are discussed. The results and comparison with observations and with earlier predictions without grain-size influence can be found in section 3. Section 4 contains the discussion and section 5 presents the conclusions.

2 The bed pattern model

2.1 The theoretical model to predict large-scale bed forms

The three-dimensional model of Hulscher (1996) explains how tidal currents form rhythmic bed patterns in sandy beds. The model is based on the three-dimensional shallow water equations, applied to a tidal flow. An empirical bed-load transport, which includes slope effects, models the sediment transport and the bed level changes are calculated using the sediment balance. In Hulscher (1996), tide and seabed are regarded as a coupled system. The bed patterns are assumed to be free instabilities of this system. A linear stability analysis is performed to study pattern dynamics, which means that only small amplitude perturbations are considered. The model calculates growth rates for every wavelength and orientation which characterize the spatial structure of the pattern. If all growth rates are negative, all bed patterns are damped and so a flat bed is stable. In this research we define a flat bed as a bed where no large-scale bed forms occur. However, if at least one bed pattern has a positive growth rate, the situation with the flat bed is unstable and a wavy bed pattern occurs. The wavelength with the fastest growing mode is considered to represent the occurring bed form (Figure 3).

Figure 3

From the rather sophisticated model of Hulscher (1996) a large-scale bed form prediction model was developed that uses the parameters water depth, flow velocity and sediment grain size to give location specific predictions for the type of bed form that occurs at a certain location in the southern North Sea (Figure 4).

Figure 4

The values of the resistance parameter (\hat{S}) and the Stokes number (E_v) are estimated by fitting the partial slip model used in Hulscher (1996) to a more realistic turbulence model including a no-slip condition at the bed and a parabolic eddy viscosity (Hulscher and Roelvink, 1997), which leads to the following expressions:

$$E_v = \frac{3\pi u \kappa^2 B}{4H\sigma A}$$

$$\hat{S} = \frac{3\pi u \kappa^2 B}{4H\sigma A \left(AB - \frac{1}{3} \right)}$$

Where:

$$A = \left[\ln\left(\frac{H}{z_0}\right) - \frac{1}{\varepsilon} + \frac{1-\varepsilon}{\varepsilon} \ln\left(\frac{1-\varepsilon}{1-\varepsilon \frac{z_0}{H}}\right) + \frac{\varepsilon-1}{\varepsilon^2} \ln(1-\varepsilon) \right]$$

$$B = \frac{3-2\varepsilon}{6}$$

In which, κ is the Von Karman constant, u is the depth-averaged flow velocity, H is the local mean depth, σ is the tidal frequency, z_0 is the level of zero-intercept (the level above the seabed, where the flow velocity is zero) and ε is the viscosity variation parameter (which denotes the influence of waves). In the case of a moderate resistance (small \hat{S} and large E_v), the Stokes boundary layer is much larger than the water depth and the vertical shear in the horizontal velocities is small. Then the flow resembles the depth-averaged flow in the sand bank model of Hulscher (1996).

Figure 5

Hulscher and van den Brink (2001) tested the model of Hulscher (1996) against observations of sand wave occurrence on the North Sea basin scale. Figure 5 shows the predictions of Hulscher and van den Brink (2001). They conclude that for the southern

part of the North Sea the parameter that denote the level of zero intercept (z_0) and the viscosity variation parameter (ϵ) differ enough to distinguish between the possible bed forms. With respect to sand waves, the model can predict the outline of a sand wave field but is unable to explain the smaller scale variation in the area. Therefore, they conclude that there must be other factors that are not included in the model, which influence the occurrence of sand waves. One of these factors may be the type of bed deposit.

2.2 Inclusion of a grain size dependency

A grain size dependency is included in the model, to investigate if this indeed improves the prediction of bed forms in the model. The grain size of the sediment influences the initiation of motion of the grains. Sediment transport takes place when a certain critical shear stress is exceeded.

The critical bed shear stress is denoted by:

$$\tau_{cr} = \theta_{cr} \cdot g(\rho_s - \rho)d_{50}$$

Where g is the gravitational acceleration ($9.81 \text{ (m/s}^2\text{)}$), ρ is the density of seawater (1025 kg/m^3), ρ_s is the sediment density (2650 kg/m^3), d_{50} is the median grain size and θ_{cr} is the critical Shields parameter which is calculated using the equation of Soulsby and Whitehouse (1997):

$$\theta_{cr} = \frac{0.30}{1 + 1.2D_*} + 0.055[1 - \exp(-0.020D_*)]$$

In which D_* is the dimensionless sediment parameter, denoted by:

$$D_* = d_{50} \left[\frac{\Delta g}{\nu^2} \right]^{\frac{1}{3}}$$

Where Δ is the relative density and ν is the kinematic viscosity ($1.36 \cdot 10^{-6} \text{ (m}^2\text{/s)}$).

Figure 6

Figure 6 shows the bed shear stress for a varying flow velocity for four typical grain size dependent bed shear stress equations (Dawson et al., 1983, Van Rijn, 1993, Soulsby, 1997). Herein, we have chosen the grain size d_{50} is 200 μm , which is a typical grain size found in sand waves. Belderson (1986) showed (figure 2) that the occurrence of sand waves depends on the magnitude of the flow velocity. Above the critical value of 0.5 (m/s) sand waves are observed. Therefore, we choose an equation that exceeds the critical bed stress closest to 0.5 (m/s) i.e. Soulsby (1997), which is denoted by:

$$\tau_b = \rho C_D u^2$$

In which u is the depth-averaged flow velocity and C_D is defined by:

$$C_D = 0.0415 \left(\frac{z_0}{H} \right)^{\frac{2}{7}}$$

In which z_0 is:

$$z_0 = \frac{d_{50}}{12}$$

The bed shear stress and the critical bed shear stress are calculated using the location specific parameters (grain size, water depth and flow velocity) as input parameters. In the model we assume that no sediment transport takes place when the critical bed shear stress exceeds the bed shear stress:

$$\begin{aligned} \tau_b \leq \tau_{cr} &\quad \rightarrow \quad \bar{S}_b = 0 \\ \tau_b > \tau_{cr} &\quad \rightarrow \quad \bar{S}_b = \alpha |\tau_b|^b \left\{ \frac{\bar{\tau}_b}{|\bar{\tau}_b|} - \lambda \bar{\nabla} h \right\} \end{aligned}$$

We use a general sediment transport equation and only take into account bed load, which is assumed to be dominant in offshore tidal regimes (Hulscher, 1996). Parameter b denotes the non-linearity of transport in relation with the bed shear stress, λ is a bed-slope correction term, h denotes the height of the bed form and α is a bed load transport proportionality parameter.

2.3 The GIS and datalayers

In this research we use a GIS environment to calculate predictions for the southern part of the North Sea. Location specific parameters are used as model input (Figure 7), which results in location specific predictions for the occurrence of sand banks and sand waves. The model that is used to predict large-scale bed forms is connected to the GIS using a Dynamic Library Link (DLL).

Figure 7

The grain size data is digitized from different geological maps from the Dutch, British and Belgian Hydrographical Services. The tidal data is obtained using a model (ZUNOWAQ) (Verlaan et al.,2005) The model calculates the tidal components for a certain number of grid points. To obtain a continuous flow field, the data from the grid points is interpolated, here we used the M2 component. The water depth is taken from the boundary conditions of the model (Van den Brink, 1998).

3 Results and comparison with observations

3.1 Results

The bed pattern predictions, after inclusion of grain size dependency, are shown in Figure 8. In a large area sand banks and sand waves are predicted but along the Belgian and Dutch coast and in the north-east of the area a flat bed is predicted. Furthermore, there is a small area where only sand banks are predicted.

Figure 8

When we compare the results of the prediction to the grain size data, we can see that in front of the Belgian and Dutch coast, a mainly flat bed (i.e. no large-scale bed forms are present) is predicted, here the bed shear stress does not exceed the critical value

although fine sediment is present. This is due to the lower flow velocities in this part of the North Sea. However, at a few places in this area sand waves and sand banks are predicted, which is due to the presence of even finer sediment at these locations. In the north-east of the research area the presence of fine sediment is combined with low flow velocities, which causes the prediction of a flat bed (i.e. no large-scale bed forms) at this location.

3.2 Comparison with observations

Figure 9

The comparison between the prediction of the model and observations of sand waves in the North Sea is given in Figure 9. The model gives a correct prediction in the north of the research area, where a flat bed (no large-scale bed forms are present) is both predicted and observed. Also, along the Dutch coast the prediction of a flat bed is correct according to the observations. In the middle of the southern North Sea sand waves are both predicted and observed. The model gives an over prediction of the area where sand waves occur, especially along the British coast. Here, only patches of sand waves are observed, but the model predicts a large area of sand waves. The model gives a correct pattern occurrence prediction in 62% of the research area.

Figure 10

In Figure 10 the discretized $E_v - \hat{S}$ scheme is plotted that is used to calculate the bed form prediction on a specific location in the North Sea. The blue area denotes the calculated E_v and \hat{S} value pairs for locations in the North Sea where sand waves are observed.

As can be seen from the figure, most of the E_v and \hat{S} values of locations where sand waves occur in the North Sea (blue area) correspond with values where the model predicts sand waves and sand banks. A small part of the sand wave occurrence in the

North Sea corresponds with an area in the model where a flat bed is predicted or where no prediction can be given. Note that in this figure, the critical bed shear stress that has to be exceeded is not taken into account.

3.3 Comparison of predictions with and without grain-size dependency

The model results are also compared to the results without grain size influence (Figure 11). When grain size is taken into account in the model, larger areas of flat bed are predicted. This is caused by the fact that the bed shear stress and the critical bed shear stress are influenced by the grain size. When the grain size increases, the bed shear stress and the critical shear stress increase too, but as the critical bed shear stress increases more rapidly than the bed shear stress, at a certain grain size the bed shear stress does not exceed the critical bed shear stress anymore, so if the bed material is coarser than that critical size, no sediment transport takes place anymore and a flat bed is predicted. A flat bed (no large-scale bed forms) is also predicted along the Belgian and Dutch coast, although the grain size is equal to the grain size in a large part of the North Sea where the occurrence of sand waves is predicted. This difference in prediction is caused by the flow velocity which is lower in front of the Belgian and Dutch coast. The critical bed shear stress is not exceeded, no sediment transport takes place and hence, no large-scale bed forms are predicted.

Figure 11

When a grain-size dependency is included in the model, the area where a correct prediction is given increases from 51% to 62%.

4 Discussion

The quality and availability of data influences the results strongly. The grain size data is digitized on a certain grid size, the size of the grid is such, that patchiness of

alternating gravel and sand is not picked up. This might be the case in front of the British coast, where the model predicts a large sand wave area, but observations show only small patches of sand waves. This patchiness may be due to the presence of gravel patches which are not included in the grain size data.

When the critical shear stress is exceeded and sediment transport occurs, this sediment transport is calculated without further taking into account the influence of the critical shear stress. So, the calculation of sediment transport is made using τ_b instead of $(\tau_b - \tau_c)$. This means that the calculated sediment transport may be higher than the actually occurring transport. This has no effect on the type of bed form that is predicted but does influence the evolving time of the different bed patterns. As in this paper we are only interested in the type of bed form that occurs in an equilibrium situation, this way of calculating sediment transport has no influence on the results.

The sediment grain size data shows the grain size in classes. To be able to use the grain size in calculations, one discrete value is used. Here we used the mean grain size value of a class. This can cause errors in the prediction since the actual occurring grain size can be bigger or smaller.

Here, we calculated the occurrence of bed patterns using observed grain sizes. In reality, the grain size distribution is coupled to the bed forms. Walgreen et al. (2004) show that the bed forms cause a sorting of the sediment. In general however, these variations are small. The resolution of the grain size data is too coarse to take this effect into account.

Figure 12

In the new prediction, the area where sand waves occur is over predicted. In Figure 6 we see that at the critical flow velocity that Belderson (1986) proposes (0.5 m/s), the bed shear stress equation of Soulsby (1997) has already exceeded the critical bed shear stress and sediment transport is already taking place. The only equation that is still below the critical shear stress at a flow velocity of 0.5 m/s is the equation of Strickler. However, this

equation gives a large under prediction of the sand wave area, as can be seen in Figure 12. From the results, it can be concluded that the bed shear stress equation that is chosen, has a large influence on the results of the model. As most expressions for the critical bed shear stress and the bed shear stress contain empirical parameters, which are estimated using datasets that are mostly acquired from laboratory experiments, these parameters can be less suitable for offshore conditions and adapting these parameters could yield a better result.

5 Conclusion

Including a grain size dependency in the model, improves the predictions of the model. Large areas are predicted where sand banks and sand waves occur, in some smaller areas only sand banks are predicted. Along the Belgian and Dutch coast and in the north east of the research domain areas of flat bed are predicted. There are large areas where sand waves are both predicted and observed. When the predictions that include a grain size dependency are compared to predictions without sediment influence, larger areas of flat bed are predicted and the overall correct prediction increases from 51% to 62%. This means that inclusion of a grain-size dependency is important to predict the occurrence of sand waves.

The model is a good starting point to investigate the effects of human activities in the area, like large-scale sand extraction, on the occurrence of large-scale morphological features.

Acknowledgements

The authors would like to thank René Buijsrogge and Blanca Pérez Lapeña for their help with the GIS.

This research is co-financed by the EU-project HUMOR (EVK3-CT-2000-00037) and the project PhD@Sea, which is substantially funded under the BSIK-programme of the Dutch Government and supported by the consortium WE@Sea.

References

Belderson RH (1986) Offshore tidal and non-tidal sand ridges and sheets: differences in morphology and hydrodynamic setting. In: Shelf Sands and Sandstones. Knight RJ, McLean JR eds, Canadian Society of Petroleum Geologists. Memoir II: 293-301.

Dawson GP, Johns B, Soulsby,RL (1983). A numerical model of shallow-water flow over topography. In: Physical Oceanography of Coastal and Shelf Seas. Johns B, Amsterdam, Elsevier: 267-320.

Heywood I, Cornelius S, Carver s (1998) An introduction to Geographical Information Systems. New York, Addison Wesley Longman Limited.

Hulscher SJMH (1996) Tidal-induced large-scale regular bed form patterns in a three-dimensional shallow water model. Journal of Geophysical Research 101(C9): 20,727-20,744.

Hulscher SJMH, Roelvink JA (1997) Comparison between predicted and observed large-scale sea bed features in the southern North Sea. Research Report, University of Twente, Enschede, The Netherlands.

Hulscher SJMH, Van den Brink GM (2001) Comparison between predicted and observed sand waves and sand banks in the North Sea. Journal of Geophysical Research 106(C5): 9327-9338.

Németh AA, Hulscher SJMH, de Vriend HJ (2002) Modelling sand wave migration in shallow shelf seas. Continental Shelf Research 22/18-19: 2795-2806.

Soulsby RL (1997) Dynamics of Marine Sands: a manual for practical applications. London, Thomas Telford Publications.

Soulsby RL, Whitehouse RJSW (1997) Treshold of sediment motion in coastal environments. Proc. Pacific Coasts and Ports, 149-54, Christchurch, University of Canterbury, New Sealand.

Van den Brink GM (1998) Prediction of sand wave occurrence, MSc-thesis, Water Engineering & Management, University of Twente, Enschede, The Netherlands.

Van der Molen J (2002) The influence of tides, wind and waves on the net sand transport in the North Sea. Continental Shelf Research 22: 2739-2762.

Van Rijn RC (1993) Principles of sediment transport in rivers, estuaries and coastal seas. Amsterdam, Aqua Productions.

Verlaan M, Zijderfeld A, De Vries H, Kroos J (2005) Operational storm surge forecasting in the Netherlands: developments in the last decade. Phil. Trans. R. Soc. A 363: 1441-1453 DOI 10.1098/rsta.2005.1578.

Walgreen M, De Swart HE, Calvete D (2004) A model for grain-size sorting over tidal sand ridges.
Ocean Dynamics 54: 374-384 DOI 10.1007/s10236-003-0066-3

Figure legends:

Figure 1: Sand bank (black lines) and Sand wave (brown areas) occurrence in the North Sea.

Figure 2: Areas where the mean spring near-surface peak tidal currents are stronger than 50 cm/s (grey) and where sand waves occur (within the thick dashed line) (Belderson, 1986).

Figure 3: Characteristic bed forms predicted by the three-dimensional shallow-water model as a function of the resistance parameter (\hat{S}) and the Stokes number (E_v) (Hulscher, 1996).

Figure 4: Discretized $E_v - S$ scheme. FB: flat bed, SB: sand banks, SB & SW: sand banks and sand waves, SW: sand waves.

Figure 5: Original prediction made by Hulscher and van den Brink (2001).

Figure 6: Different bed shear stress equations plotted against the flow velocity. The dotted vertical line denotes the critical flow velocity (0.5 (m/s)). The grain size is 200 μm and the water depth is 20 metre.

Figure 7: Input layers of the GIS

Figure 8: Prediction of the model when a grain-size dependency is included.

Figure 9: Comparison of the prediction with observations of sand waves.

Figure 10: Discretized scheme (after Figure) in which the occurrence of sand waves is plotted. (FB – flat bed (i.e. no large-scale bedforms), SB – sand banks, SB&SW – sand banks and sand waves, SW – sand waves).

Figure 11: Comparison between the results of Hulscher and van den Brink (2001) and the model where a grain-size dependency is included.

Figure 12: Prediction of the model, when the bed shear stress equation of Strickler is included.

Figure 1:

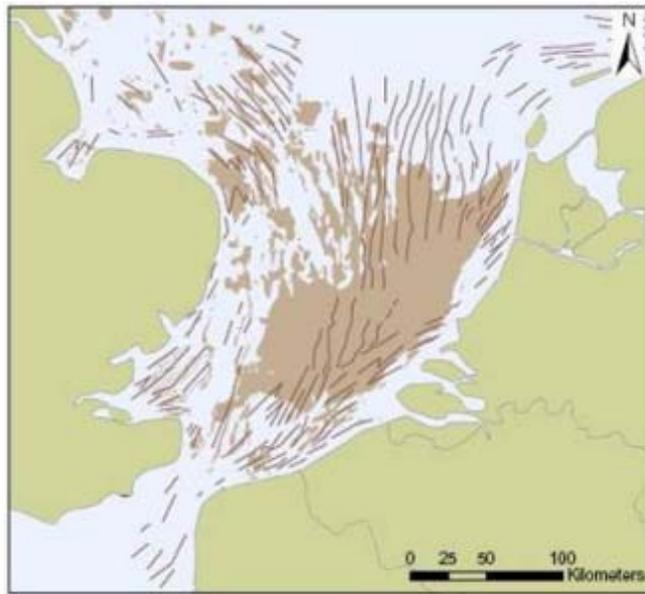


Figure 2:

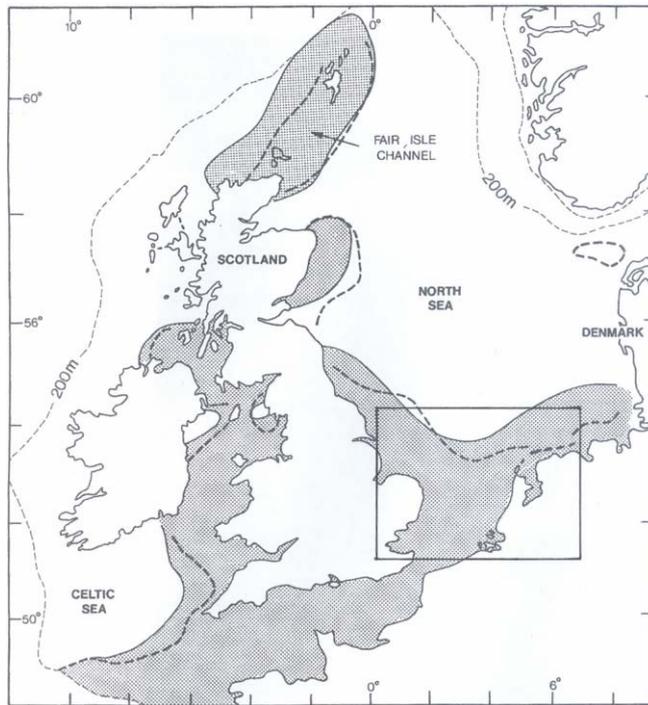


Figure 3:

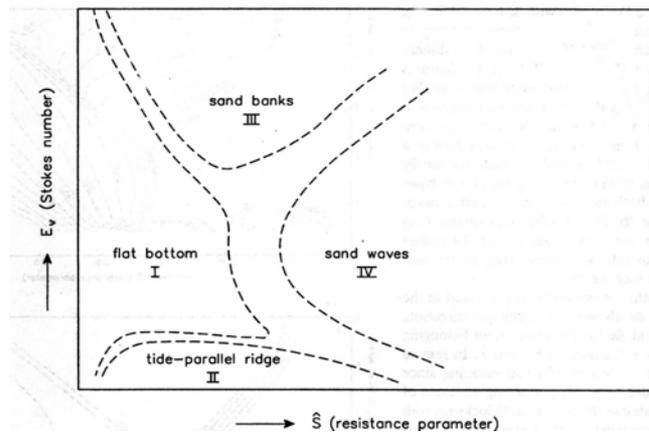


Figure 4:

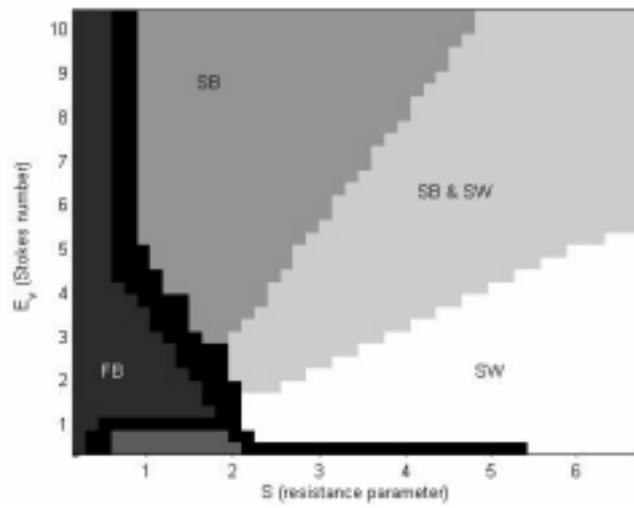


Figure 5:

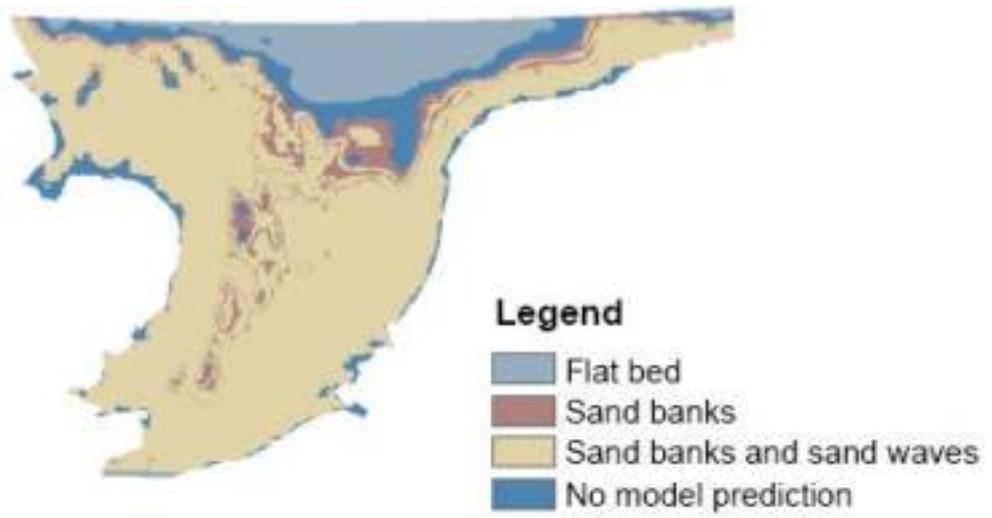


Figure 6:

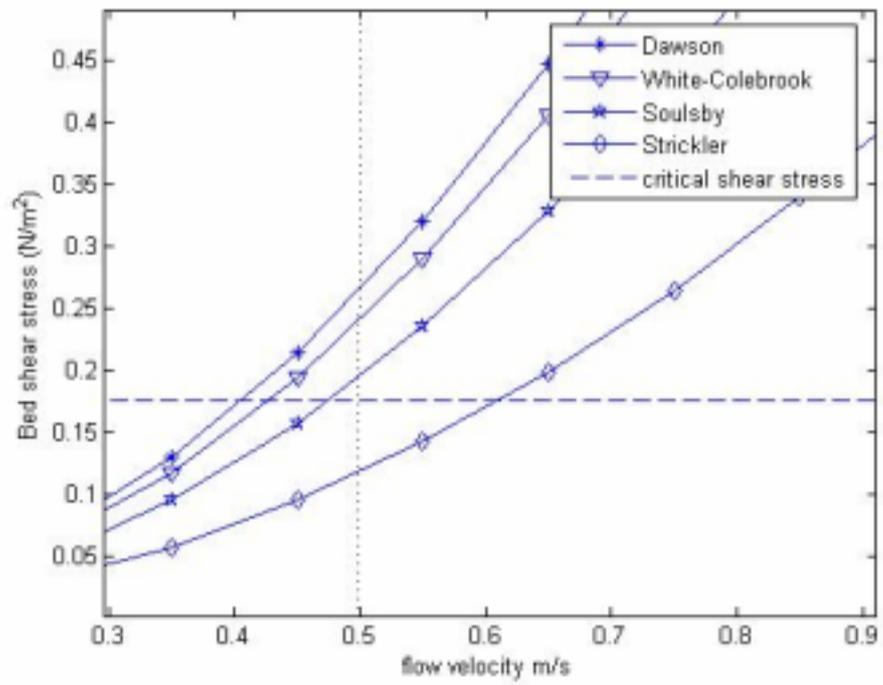


Figure 7:

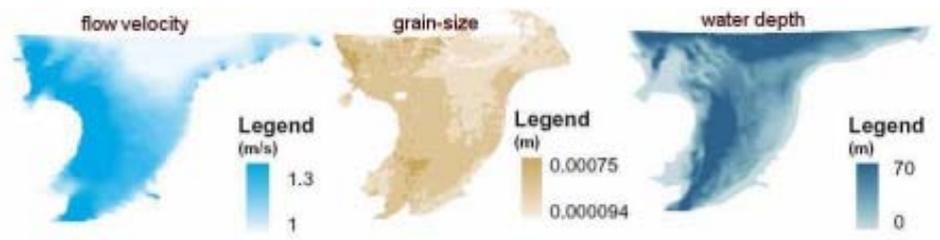


Figure 8:

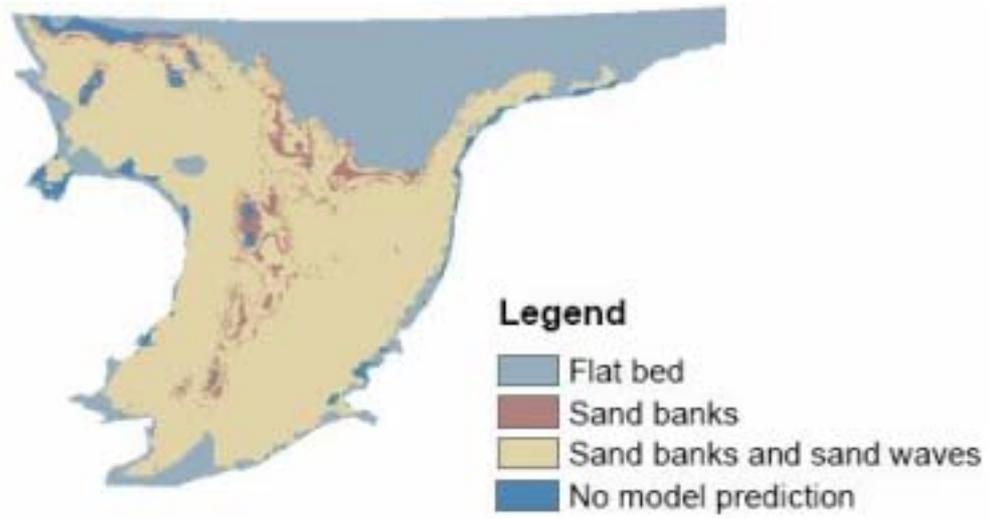


Figure 9:

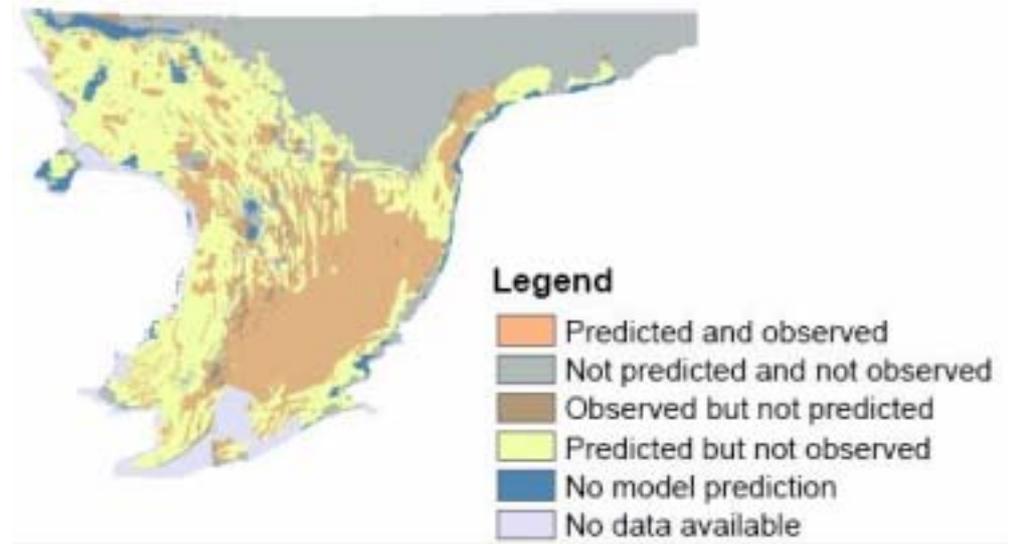


Figure 10:

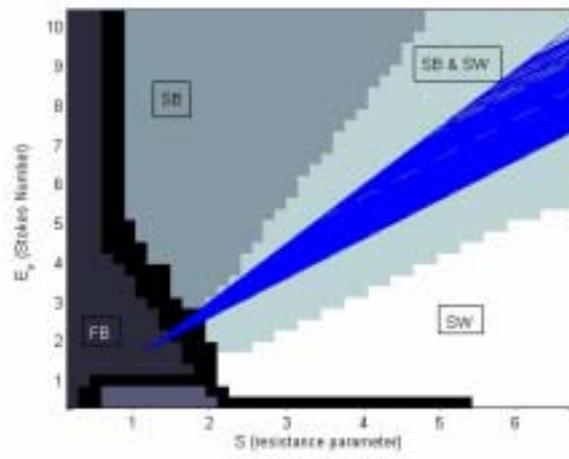


Figure 11:



Figure 12:

